

NEU-VICTOR 54" x 31"
BATHTUB with INTEGRAL APRON

- 2918RIC - Soaker Tub, Right Hand Outlet
- 2918LIC - Soaker Tub, Left Hand Outlet

Product Features:

- High gloss acrylic surface with fiberglass reinforcement
- Recess tub with integral apron
- Integral three-sided, 1" tiling/water retention flange
- Shallower soaker suited for bathing children
- Reclined backrest for lumbar support
- Designed for space saving applications

Nominal Dimensions:

1372 x 800 x 381mm
(54" x 31-1/2" x 15")

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- CSA B45.5-11/IAPMO Z124-2011
- IAPMO (cUPC)





To Be Specified - Required:

- Colour:
- Bath Faucet*: (specify finish)
- Universal Drain: 1583 470 (specify finish)
Available in Chrome 002 and Satin 295

*For Colour/finish availability and other faucet choices, please see the American Standard Product Selector and Pricing Guide.

SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS

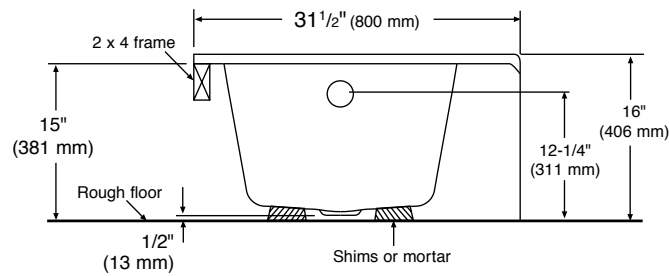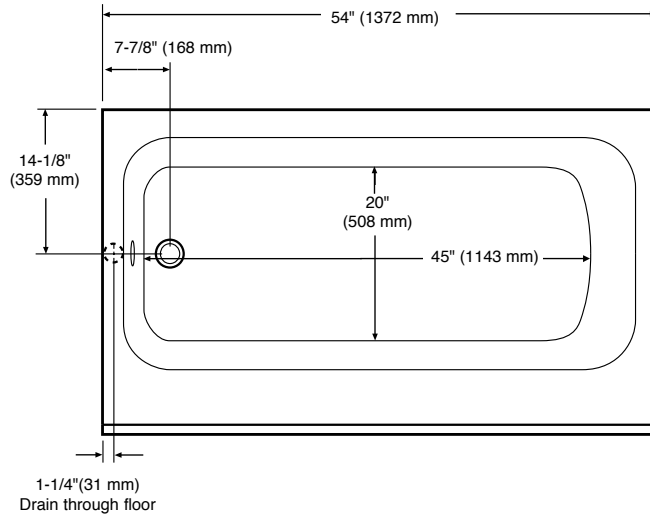

Bowl depth: 14"

GENERAL SPECIFICATIONS FOR 2918LIC/IRIC BATHING POOL	
INSTALLED SIZE	1372 x 800 x 381 mm (54 x 31-1/2 x 15 In.)
WEIGHT	50 Lbs. (23 Kg.)
WEIGHT w/WATER	290 Lbs. (132 Kg.)
GALLONS TO OVERFLOW	24 Gal. (109 L.)
BATHING WELL AT SUMP	45 x 20 In. (1143 x 508 mm)
WATER DEPTH TO OVERFLOW	15-3/4 In. (400 mm)
FLOOR LOADING	32 Lbs./Sq.Ft. (156 Kg./Sq. m)
(PROJECTED AREA)	
PTS.	12.6
CUBE (Ft ³)	18

* ALL DIMENSIONS MAY VARY ± 1/4" (6mm)

NOTE:

BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH TUB FOR ADDITIONAL INFORMATION.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.