


**MODEL NUMBER:**

- **4147.100 Kitchen Faucet with Pull-Out Spray**  
Escutcheon plate (installation is optional).

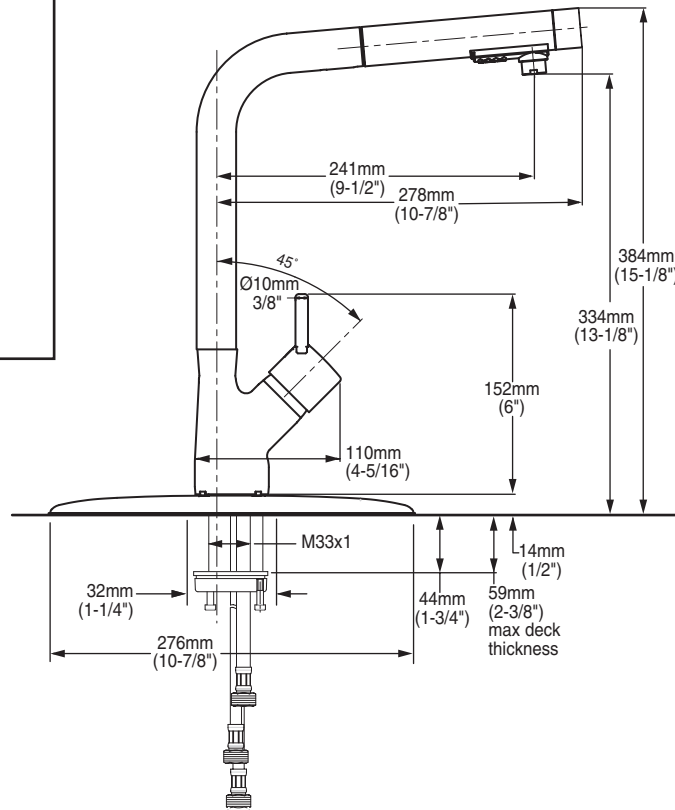

**GENERAL DESCRIPTION:**

Forged brass body with pull-out brass swivel spray spout and stamped brass escutcheon. Nylon reinforced hose is 6ft long. Washerless 35mm ceramic disc valve cartridge with hot limit safety stop. 3/8" O.D. copper supplies with 1/2" male threaded adaptors and nuts. 2.2 gpm/8.3L/min. maximum flow rate. Fitting can be mounted with or without supplied escutcheon plate (escutcheon size 10-7/8"L x 2-1/2"W x 9/16"H). Faucet can be right or left hand mounted.

**PRODUCT FEATURES:**

**Ceramic Disc Valve Cartridge:** Assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance.

**Brass and Copper Waterway:** Highest quality materials for durability & long life.

**Memory Position Valving:** Allows user to turn valve on and off at preferred temperature setting without readjusting handle position each time.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average

**Pull-out Spray:** Adjustable spray patterns - stream to spray.

**Larger Spout:** Increased height, reach and diameter.

**Choice of Finishes:** Available in Polished Chrome and Stainless Steel (PVD).


**SUGGESTED SPECIFICATION:**

Single control kitchen faucet shall feature a forged brass body with pull-out spray. Shall also feature washerless ceramic disc valve cartridge with integral hot limit safety stop. Fitting shall be American Standard Model # 4147.100.\_\_\_\_\_


**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B125**
- NSF 61 / Section 9 & Annex G**

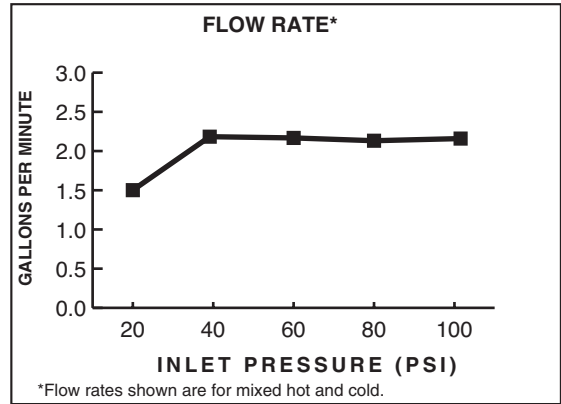

Product Number	Description	Finish Options	
		Polished Chrome	PVD Stainless Steel
4147.100	Hi flow faucet with pull out spray and hose. 3/8" copper inlets with 1/2" male threaded connectors and nuts.	002	075

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.